


BREEZY BRIGHT PLANK

PRODUCT SPECIFICATIONS


Style Name	BREEZY BRIGHT PLANK
Construction	Tufted Multi-Level Pattern Loop Pile
Yarn System	100% Nylon 6,0
Dye Method	100% Solution Dyed
Gauge	1/12"
Production Weight	22 oz psy
Total Thickness	7 - 7.50mm
Backing	ComfortBac
Tile Size	25cm x 100cm

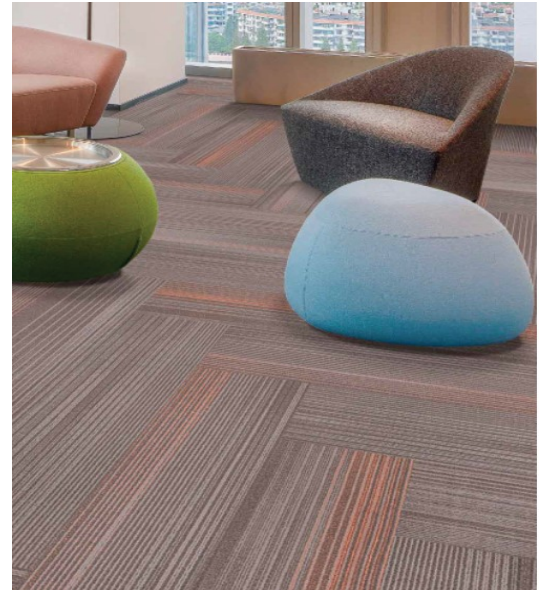

PERFORMANCE SPECIFICATIONS

Radiant Panel	ASTM E 648 Class 1
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC 134 Less than 3.5KV
Colour Fastness to Light	AATCC 16E ≥ 4
Colour Fastness to Rubbing/Crocking	AATCC 165 ≥ 4
Dimensional Stability	AACHEN $\leq 0.2\%$
Foot Traffic Recommendation TARR	Heavy Commercial
Antimicrobial	Health Guard
Certificates	Singapore Green Label Certification Singapore Green Building Product Certification (4 ticks)

RECOMMENDED INSTALLATION METHOD

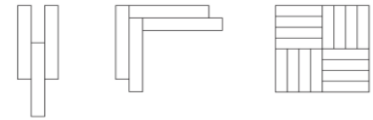

Ashlar

Herringbone

Basketweave

