


CLOUDTAIL SQ

PRODUCT SPECIFICATIONS

Style Name	CLOUDTAIL SQ
Construction	Tufted Pattern Loop Pile
Yarn System	100% BCF Nylon 6,0
Dye Method	100% Solution Dyed
Gauge	1/10"
Production Weight	23 oz psy
Total Thickness	7.50mm
Backing	FlexiBac
Tile Size	50cm x 50cm

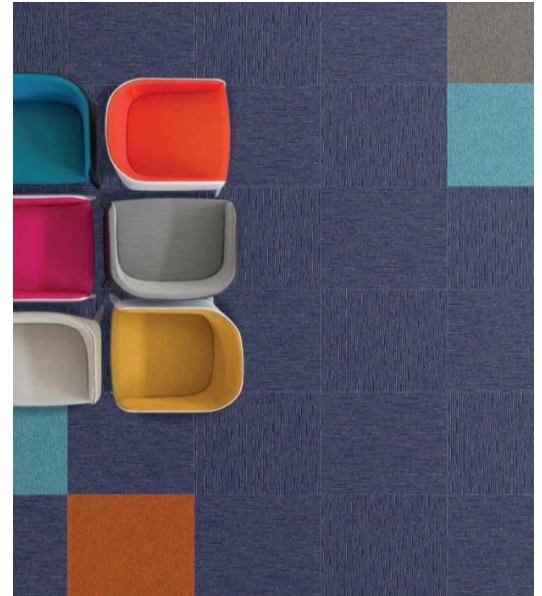


PERFORMANCE SPECIFICATIONS

Radiant Panel	ASTM E 648 Class 1
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC 134 Less than 3.5KV
Colour Fastness to Light	AATCC 16E ≥ 4
Colour Fastness to Rubbing/Crocking	AATCC 165 ≥ 4
Dimensional Stability	AACHEN $\leq 0.2\%$
Foot Traffic Recommendation TARR	Heavy Commercial
Antimicrobial	Health Guard
Certificates	Singapore Green Label Certification Singapore Green Building Product Certification (4 ticks)


RECOMMENDED INSTALLATION METHOD



1/4 Turn



Ashlar



Brick

