


LVT SERIES 2

PRODUCT SPECIFICATIONS


Style Name	LVT SERIES 2 - STONESET
Overall Gauge	3.0mm
Wear Layer	0.5mm
Surface Treatment	PUR®
Tile Size	12" X 24"

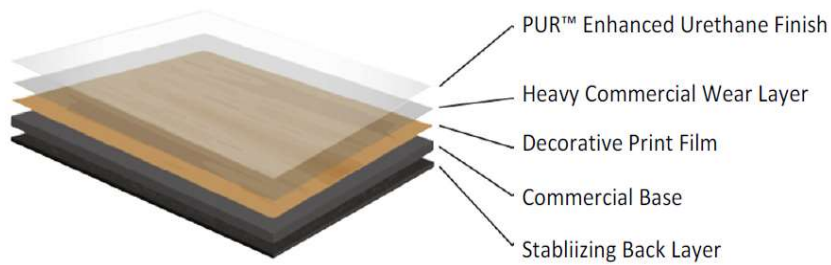


RECOMMENDED INSTALLATION METHOD



Ashlar



Herringbone



Basketweave

PERFORMANCE SPECIFICATIONS

Fire Resistance	EN13501-1 Bfl-S1
Dimension stability	EN434 <0.25%
Curling after exposure to heat	EN434 <1.2mm
Colour Fastness to Light	ISO105B02 grade>6
Abrasion resistance	EN660 Class T
Slip resistance	EN13893 Class DS
Wear Classification	Commercial Grade Resilient Tile
Sustainability	Floorscore® Certified
Treatment	Anti-Bacterial with PUR™
Warranty	10 Years Commercial Limited Warranty