
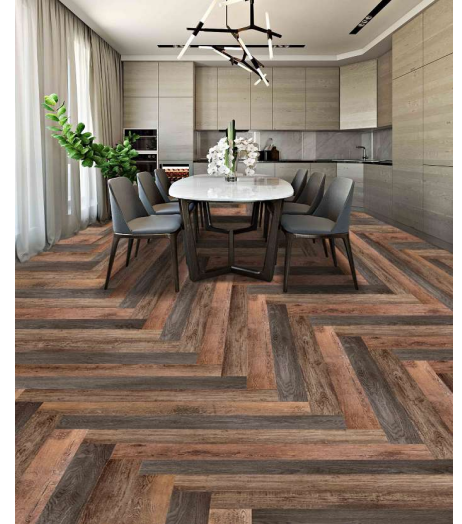



LVT SERIES 3

PRODUCT SPECIFICATIONS

Style Name	LVT SERIES 3 - WOODMIX
Overall Gauge	3.0mm
Wear Layer	0.5mm
Surface Treatment	PUR®
Tile Size	6" X 48"

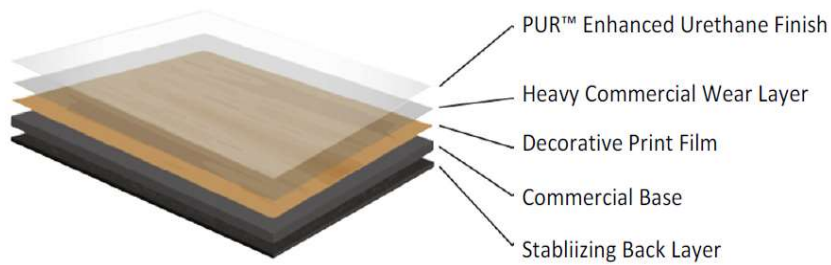

RECOMMENDED INSTALLATION METHOD

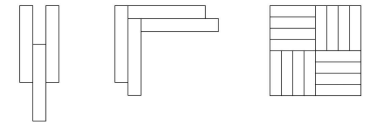

Ashlar

Herringbone

Basketweave

PERFORMANCE SPECIFICATIONS

Fire Resistance	EN13501-1 Bfl-S1
Dimension stability	EN434 <0.25%
Curling after exposure to head	EN434 <1.2mm
Colour Fastness to Light	ISO105B02 grade>6
Abrasion resistance	EN660 Class T
Slip resistance	EN13893 Class DS
Wear Classification	Commercial Grade Resilient Tile
Sustainability	Floorscore® Certified
Treatment	Anti-Bacterial with PUR™
Warranty	10 Years Commercial Limited Warranty