


## LVT SERIES 4

### PRODUCT SPECIFICATIONS

Style Name	LVT SERIES 4 - SPC CLICK
SPC Core	4.5mm
IXPE Pad	1.5mm
Wear Layer	0.5mm
Surface Treatment	PUR®
Locking System	Unilin 2G Click System
Tile Size	7" X 48"



### RECOMMENDED INSTALLATION METHOD

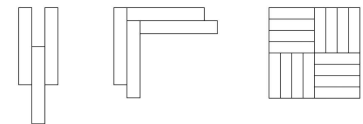

Ashlar

Herringbone

Basketweave

### PERFORMANCE SPECIFICATIONS

Fire Resistance	EN13501-1 Bfl-S1
Dimension stability	EN434 <0.1%
Curling after exposure to heat	EN434 <0.05mm
Colour Fastness to Light	ISO105B02 grade>6
Abrasion resistance	EN660 Class T
Slip resistance	EN13893 Class DS
Wear Classification	Commercial Grade Resilient Tile
Sustainability	Floorscore® Certified
Treatment	Anti-Bacterial with PUR™
Warranty	10 Years Commercial Limited Warranty