


## MELLIFLUOUS

### PRODUCT SPECIFICATIONS

Style Name	Mellifluous Plank
Construction	Tip Shear
Fiber	Vinicolor & Plencolor Nylon 6
Stitches	10 per inch
Pile Height	5.5-7.5mm
Pile Weight	32 oz psy
Backing	EcoAceBac
Tile size	25cm x 100cm
Packing	16pcs = 4 sm/box

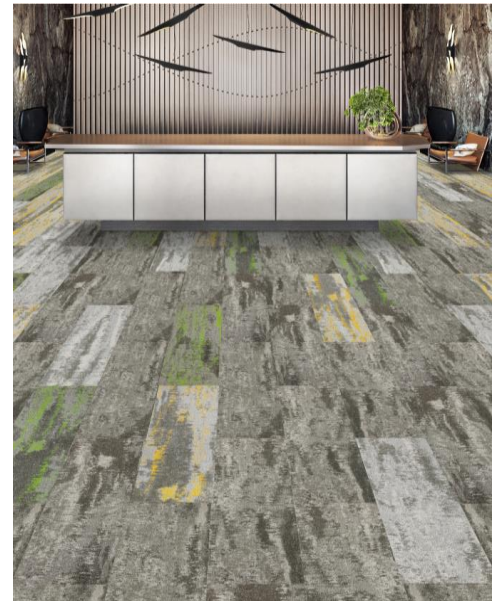

### PERFORMANCE SPECIFICATIONS

Radiant Panel	ASTM E 648 Class 1
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC 134 Less than 3.5KV
Colour Fastness to Light	AATCC 16E $\geq 4$
Colour Fastness to Rubbing/Crocking	AATCC 165 $\geq 4$
Dimensional Stability	AACHEN $\leq 0.2\%$
Foot Traffic Recommendation TARR	Heavy Commercial
Antimicrobial	Health Guard
Certificates	Singapore Green Label Certification Singapore Green Building Product Certification (4 ticks)

### RECOMMENDED INSTALLATION METHOD

