


## PAVERS

### PRODUCT SPECIFICATIONS

Style Name	Pavers Plank
Construction	Multi - Level Loop
Fiber	Universal Nylon 6 & Aquail Nylon 6
Stitches	8 per inch
Pile Height	3.5-6.5mm
Pile Weight	23 oz / yd <sup>2</sup>
Backing	ComfortBac v2
Tile size	33cm x 100cm
Packing	15pcs = 5 sm/box

### PERFORMANCE SPECIFICATIONS

Radiant Panel	ASTM E 648 Class 1
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC 134 Less than 3.5KV
Colour Fastness to Light	AATCC 16E ≥4
Colour Fastness to Rubbing/Crocking	AATCC 165 ≥4
Dimensional Stability	AACHEN ≤0.2%
Foot Traffic Recommendation TARR	Heavy Commercial
Antimicrobial	Health Guard
Certificates	Singapore Green Label Certification Singapore Green Building Product Certification (4 ticks)

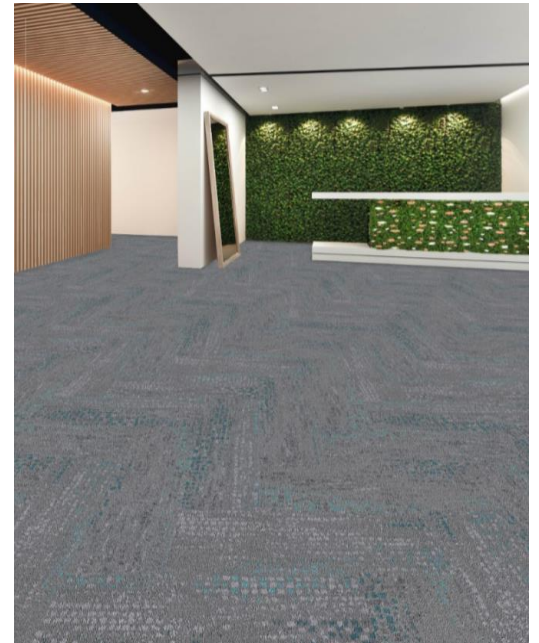

### RECOMMENDED INSTALLATION METHOD

