


ENIGMATIC

PRODUCT SPECIFICATIONS

| | |
|--------------|-------------------------|
| Style Name | Enigmatic Tile |
| Construction | Multi - Level Loop |
| Fiber | 100% Universal Nylon 6 |
| Stitches | 7 per inch |
| Pile Height | 7.0-8.0mm |
| Pile Weight | 25 oz / yd ² |
| Backing | ComfortBac v2 |
| Tile size | 50cm x 50cm |
| Packing | 20pcs = 5 sm/box |

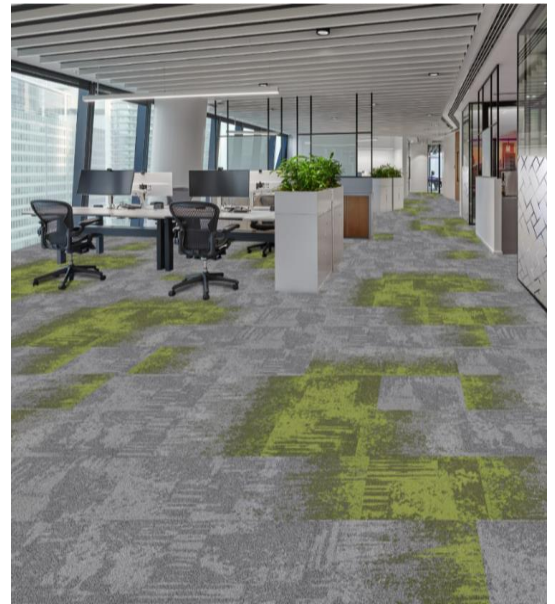

PERFORMANCE SPECIFICATIONS

| | |
|-------------------------------------|---|
| Radiant Panel | ASTM E 648 Class1 |
| Smoke Density | ASTM E 662 Less than 450 |
| Static Propensity | AATCC 134 Less than 3.5KV |
| Colour Fastness to Light | AATCC 16E ≥4 |
| Colour Fastness to Rubbing/Crocking | AATCC 165 ≥4 |
| Dimensional Stability | AACHEN ≤0.2% |
| Foot Traffic Recommendation TARR | Heavy Commercial |
| Antimicrobial | Health Guard |
| Certificates | Singapore Green Label Certification Singapore Green Building Product Certification (4 ticks) |

METHOD OF INSTALLATION

