


SPARKLE / SPARKLING FOLIAGE

PRODUCT SPECIFICATIONS

Style Name	Sparkle Plank
Style Name	Sparkling Foliage Plank
Construction	Tip Shear
Fiber	100% Universal Nylon 6
Stitches	10 per inch
Pile Height	5.0-8.0mm
Pile Weight	25 oz psy
Backing	ComfortBac v2
Tile size	25cm x 100cm
Packing	20pcs = 5 sm/box

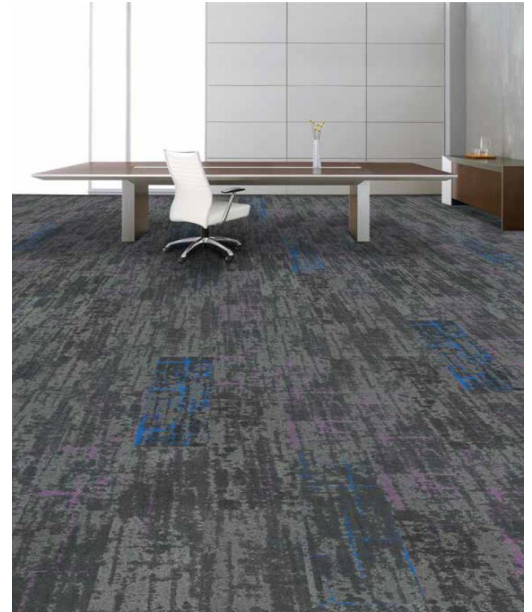

PERFORMANCE SPECIFICATIONS

Radiant Panel	ASTM E 648 Class 1
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC 134 Less than 3.5KV
Colour Fastness to Light	AATCC 16E ≥ 4
Colour Fastness to Rubbing/Crocking	AATCC 165 ≥ 4
Dimensional Stability	AACHEN $\leq 0.2\%$
Foot Traffic Recommendation TARR	Heavy Commercial
Antimicrobial	Health Guard
Certificates	Singapore Green Label Certification Singapore Green Building Product Certification (4 ticks)

RECOMMENDED INSTALLATION METHOD

