


## BASICAL SQ

### PRODUCT SPECIFICATIONS

Style Name	BASICAL SQ
Construction	Tufted Textured Loop Pile
Yarn System	100% BCF Synthetic Fiber
Dye Method	100% Solution Dyed
Gauge	1/10"
Production Weight	17 oz psy
Total Thickness	6.50mm
Backing	FlexiBac
Tile Size	50cm x 50cm

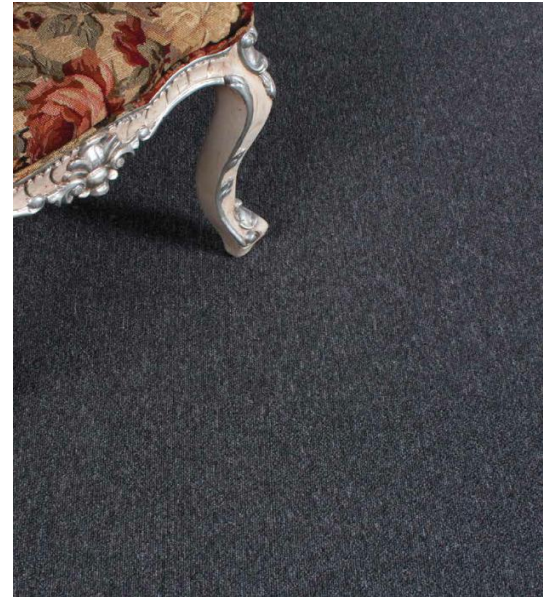


### PERFORMANCE SPECIFICATIONS

Radiant Panel	ASTM E 648 Class 2
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC 134 Less than 3.5KV
Colour Fastness to Light	AATCC 16E $\geq 4$
Colour Fastness to Rubbing/Crocking	AATCC 165 $\geq 4$
Dimensional Stability	AACHEN $\leq 0.2\%$
Foot Traffic Recommendation TARR	Light Commercial


### RECOMMENDED INSTALLATION METHOD



1/4 Turn



Ashlar



Brick