


RADIANT HEX

PRODUCT SPECIFICATIONS


Style Name	RADIANT HEX
Construction	Level Loop Pile
Yarn System	100% Nylon 6,0
Dye Method	100% Solution Dyed
Gauge	1/10"
Production Weight	18 oz psy
Total Thickness	7.00mm / 6.00mm
Backing	FlexiBac / ComfortBac v2
Tile Size	73.2cm x 63.4cm

PERFORMANCE SPECIFICATIONS

Radiant Panel	ASTM E 648 Class 1
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC 134 Less than 3.5KV
Colour Fastness to Light	AATCC 16E ≥ 4
Colour Fastness to Rubbing/Crocking	AATCC 165 ≥ 4
Dimensional Stability	AACHEN $\leq 0.2\%$
Foot Traffic Recommendation TARR	Heavy Commercial
Antimicrobial	Health Guard
Certificates	Singapore Green Label Certification Singapore Green Building Product Certification (4 ticks)

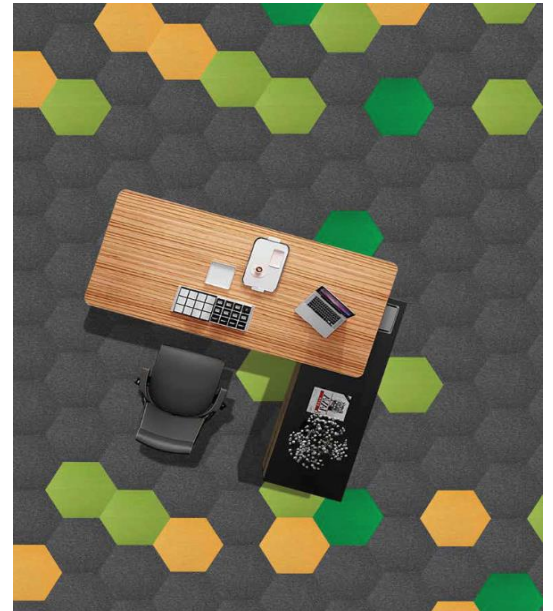

RECOMMENDED INSTALLATION METHOD



Ashlar



Random

