


CAMBORNE PLANK

PRODUCT SPECIFICATIONS

Style Name	CAMBORNE PLANK
Construction	Multi-Level Pattern Loop
Yarn System	100% Nylon 6,0
Dye Method	80% Solution Dyed / 20% Space Dyed
Gauge	1/12"
Production Weight	20 oz psy
Total Thickness	6.0mm
Backing	ComfortBac v2
Tile Size	25cm x 100cm

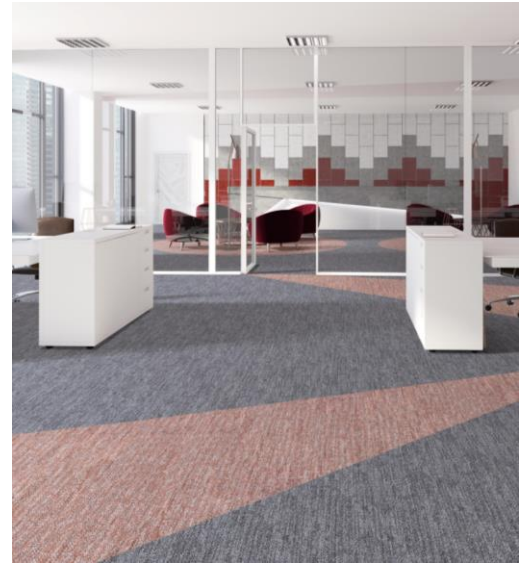


PERFORMANCE SPECIFICATIONS

Radiant Panel	ASTM E 648 Class 1
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC 134 Less than 3.5KV
Colour Fastness to Light	AATCC 16E ≥ 4
Colour Fastness to Rubbing/Crocking	AATCC 165 ≥ 4
Dimensional Stability	AACHEN $\leq 0.2\%$
Foot Traffic Recommendation TARR	Heavy Commercial
Antimicrobial	Health Guard
Certificates	Singapore Green Label Certification Singapore Green Building Product Certification (4 ticks)


RECOMMENDED INSTALLATION METHOD



Ashlar



Herringbone



Basketweave



039-017-2094
Environmentally
Preferred Carpet

