# Disassociated

## Specifications

| | |
|---|---|
| Style Name | Disassociated SQ |
| Construction | Multi-Level Pattern Loop |
| Yarn | 100% Nylon 6 |
| Dye Method | 100% Solution Dyed |
| Gauge | 1/12" |
| Total Thickness | 6 mm |
| Pile Weight | 20 oz/yd² |
| Backing | ComfortBac v2 |
| Tile Size | 50 cm x 50 cm |
| Packing | 20 pcs = 5 m² / ctn |
| Radiant Panel | ASTM E648 Class I |
| Smoke Density | ASTM E662 Less than 450 |
| Static Propensity | AATCC 134 Less than 3.5 kV |
| Colour Fastness to Light | AATCC 16E ≥4 |
| Colour Fastness to Rubbing/Crocking | AATCC 165 ≥4 |
| Dimensional Stability | AACHEN ≤0.2% |
| Foot Traffic Recommendation TARR | Heavy Commercial |
| Warranty | 15 Years |

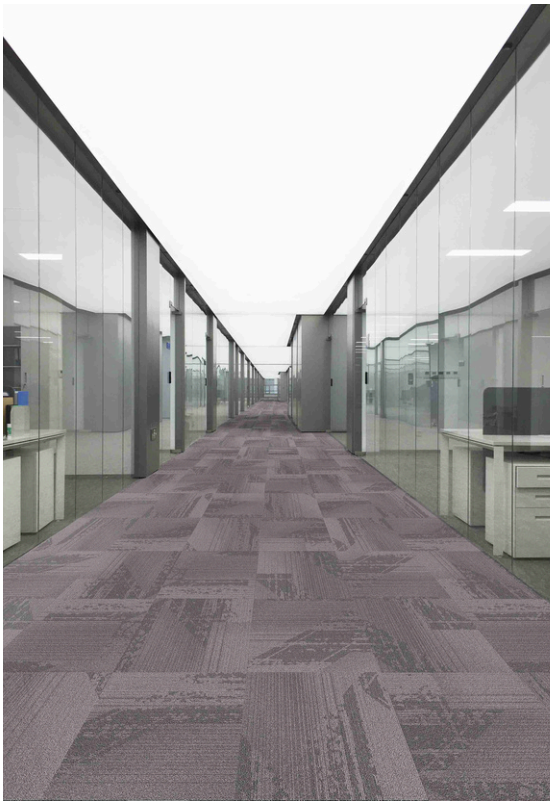

Product specifications are indicative averages derived from sample testing and are subject to typical manufacturing tolerances and natural pattern variation. Details may change without notice.
For additional information on product characteristics, recycled content, or warranty coverage, please reach out to one of our representatives or refer to the contact information below.

## Recommended Installation



Quarter turn



Brick Ashlar



Unilay



Vertical Ashlar

## Certifications

Credits contribution to:

## Contact


sales@smjf.com.sg
www.smjf.com.sg
+65 6261 1212

31 Jurong Port Road, South Wing
#02-20, Jurong Logistics Hub
Singapore 619115