


LVT Series 4 Click




Specifications

Style Name	LVT Series 4 Click
Overall Gauge	5.0 mm
Wear Layer	0.5 mm
Surface Treatment	PUR™
Locking System	Unilin 2G Click System
Tile Size - Wood	7" x 48" @ 10 pcs = 2.17 sm/box
Fire Resistance	EN13501-1 Bfl-S1
Dimension stability	EN434 <0.1%
Curling After Exposure to Heat	EN434 <0.05mm
Colour Fastness to Light	ISO105B02 Grade >6
Abrasion Resistance	EN660 Class T
Slip resistance	EN13893 Class DS
Wear Classification	Commercial Grade Resilient Tile
Treatment	Anti-Bacterial with PUR™
Warranty	10 Years

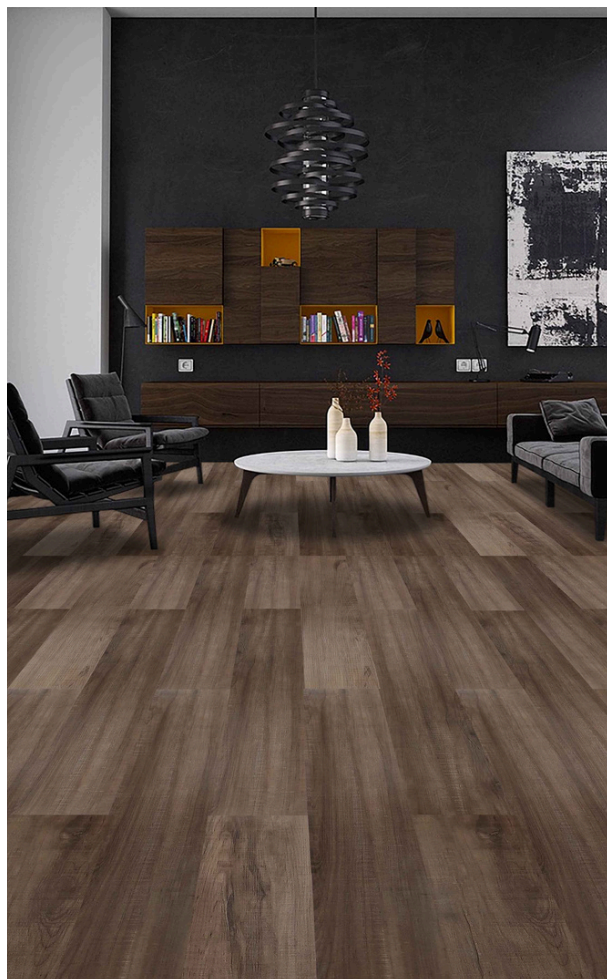


Product specifications are indicative averages derived from sample testing and are subject to typical manufacturing tolerances and natural pattern variation. Details may change without notice. For additional information on product characteristics, recycled content, or warranty coverage, please reach out to one of our representatives or refer to the contact information below.


Recommended Installation




90°
Random



90°
Subway Style



45°
Random



45°
Subway Style

Certifications



Contact

sales@smjf.com.sg
www.smjf.com.sg
+65 6261 1212

31 Jurong Port Road, South Wing
#02-20, Jurong Logistics Hub
Singapore 619115