


## CADENCE SQ

### PRODUCT SPECIFICATIONS

Style Name	CADENCE SQ
Construction	Multi-Level Pattern Loop
Yarn System	100% Nylon 6,0
Dye Method	80% Solution Dyed / 20% Space Dyed
Gauge	1/12"
Production Weight	20 oz psy
Total Thickness	6.0mm
Backing	ComfortBac v2
Tile Size	50cm x 50cm

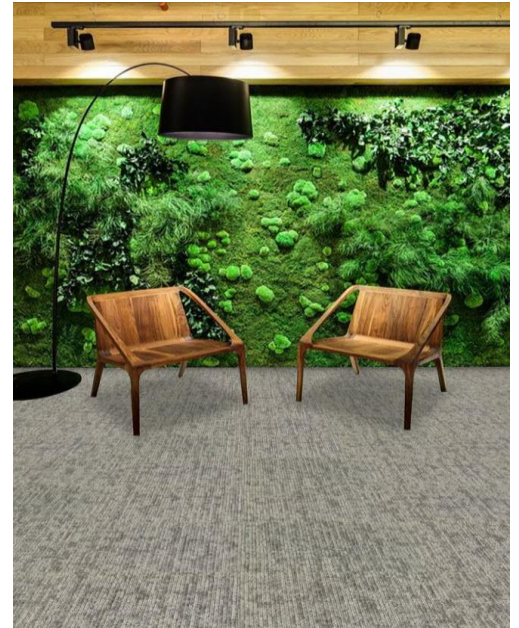


### PERFORMANCE SPECIFICATIONS

Radiant Panel	ASTM E 648 Class 1
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC 134 Less than 3.5KV
Colour Fastness to Light	AATCC 16E $\geq 4$
Colour Fastness to Rubbing/Crocking	AATCC 165 $\geq 4$
Dimensional Stability	AACHEN $\leq 0.2\%$
Foot Traffic Recommendation TARR	Heavy Commercial
Antimicrobial	Health Guard
Certificates	Singapore Green Label Certification Singapore Green Building Product Certification (4 ticks)


### RECOMMENDED INSTALLATION METHOD



1/4 Turn



Ashlar



Brick



039-017-2094  
Environmentally Preferred Carpet

