


PRODUCT SPECIFICATIONS

| | |
|-------------------|--------------------------|
| Style Name | CADENCE SQ |
| Construction | Multi-Level Pattern Loop |
| Yarn System | 100% Nylon 6,0 |
| Dye Method | 100% Solution Dyed |
| Gauge | 1/12" |
| Production Weight | 20 oz psy |
| Total Thickness | 6.0mm |
| Backing | ComfortBac v2 |
| Tile Size | 50cm x 50cm |

PERFORMANCE SPECIFICATIONS

| | |
|-------------------------------------|---|
| Radiant Panel | ASTM E 648 Class 1 |
| Smoke Density | ASTM E 662 Less than 450 |
| Static Propensity | AATCC 134 Less than 3.5KV |
| Colour Fastness to Light | AATCC 16E ≥ 4 |
| Colour Fastness to Rubbing/Crocking | AATCC 165 ≥ 4 |
| Dimensional Stability | AACHEN $\leq 0.2\%$ |
| Foot Traffic Recommendation TARR | Heavy Commercial |
| Antimicrobial | Health Guard |
| Certificates | Singapore Green Label Certification Singapore Green Building Product Certification (4 ticks) |


CADENCE SQ

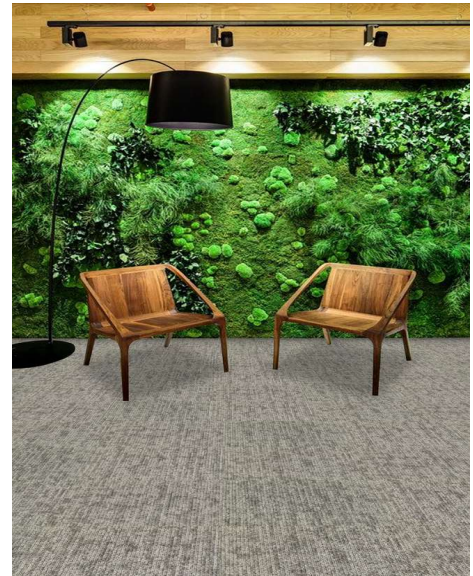


RECOMMENDED INSTALLATION METHOD



1/4 Turn



Ashlar



Brick



039-017-2094
Environmentally
Preferred Carpet

