
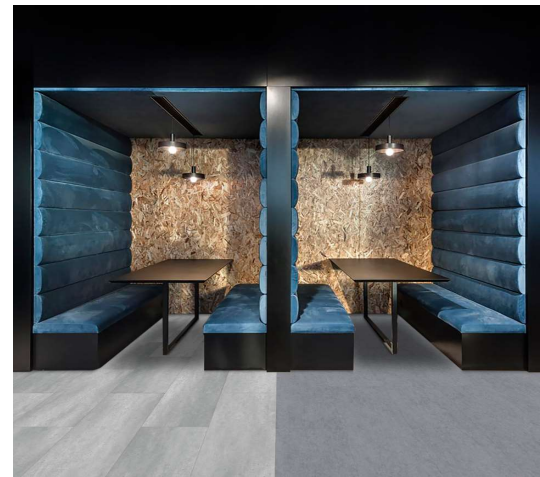



LVT SERIES 4 CLICK

PRODUCT SPECIFICATIONS

Style Name	LVT SERIES 4 Click
Overall Guage	5.0mm
Wear Layer	0.5mm
Surface Treatment	Antimicrobial treatment
Tile size - Stone	12" X 24" @ 10pcs = 1.858sm/box
Tile size - Wood	7" X 48" @ 10pcs = 2.17sm/box

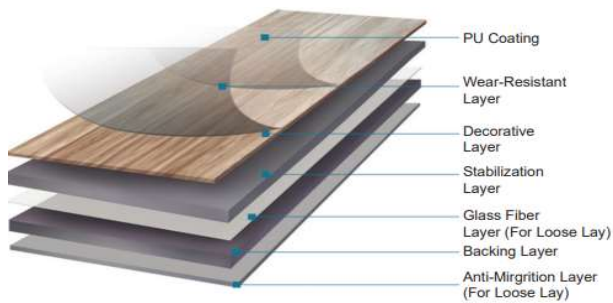

RECOMMENDED INSTALLATION METHOD



PERFORMANCE SPECIFICATIONS

Fire Resistance	EN13501-1 Bfl-S1
Dimension stability	ISO 23999 $\leq 0.25\%$ / lineal ft (305mm) - PASS
Curling after exposure to heat	ISO 23999 $\leq 0.080"$ (2.0mm) - PASS
Colour Fastness to Light	ISO105B02 Grade > 6
Abrasion resistance	EN660 Class T
Dynamic Coefficient of Friction	SS485 DCOF: 0.81 - PASS
Wear Classification	Commercial Grade Resilient Tile
Sustainability	Floorscore® Certified
Treatment	Anti-Bacterial treatment
Warranty	10 Years Commercial Limited Warranty

